

Enrico's Chart of Phase Noise and Two-Sample Variances





Enrico Rubiola - <http://rubiola.org>
 European Frequency and Time Seminar - <http://efts.eu>
 Oscillator Instability Measurement Platform <http://oscillator-imp.com>



Thanks to FIRST-TF
<https://first-tf.com>

$$\text{Clock signal } v(t) = V_0[1 + \alpha(t)] \cos[2\pi\nu_0 t + \varphi(t)]$$

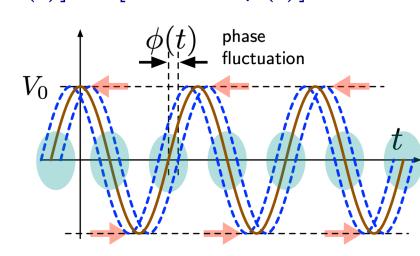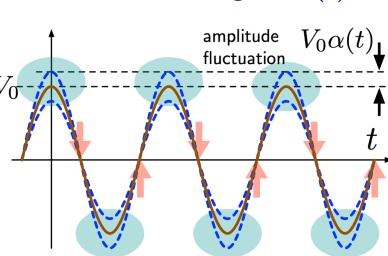

Boldface notation

total = nominal + fluctuation
 $\varphi(t) = 2\pi\nu_0 t + \varphi(t)$ phase
 $\nu(t) = \nu_0 + (\Delta\nu)(t)$ frequency
 $x(t) = t + x(t)$ time
 $y(t) = 1 + y(t)$ fractional frequency

Phase noise spectrum

Definition
 $S_\varphi(f)$ [rad²/Hz] is the one-sided PSD ($f > 0$) of $\varphi(t)$
 $S_\varphi(f) = 2\mathcal{F}\{\mathbb{E}\{\varphi(t)\varphi(t+\tau)\}\}, f > 0$

Evaluation

$$S_\varphi(f) = \frac{2}{T} \langle \Phi_T(f) \Phi_T^*(f) \rangle_m$$

avg on m data, $\Phi_T(f)$ = DFT of $\varphi(t)$ truncated on T

Usage most often, 'phase noise' refers to $\mathcal{L}(f)$

Only $10\log_{10}[\mathcal{L}(f)]$ is used, given in dBc/Hz

Definition: $\mathcal{L}(f) = \frac{1}{2}S_\varphi(f)$ [the unit c/Hz never used]

The unit 'c' is a squared angle, $\sqrt{c} = \sqrt{2}$ rad $\approx 81^\circ$

Two-sample (Allan-like) variances


Definition
 $\sigma_y^2(\tau) = \mathbb{E}\left\{\frac{1}{2}[\bar{y}_2 - \bar{y}_1]^2\right\}$ $y(t) \rightarrow \bar{y}$ averaged over τ
 \bar{y}_2 and \bar{y}_1 are contiguous

Bare mean $\bar{y} \rightarrow$ Allan variance AVAR
 Weighted averages \rightarrow MVAR, PVAR, etc.



Evaluation

$$\sigma_y^2(\tau) = \frac{1}{2(M-1)} \sum_{k=1}^{M-1} [\bar{y}_{k+1} - \bar{y}_k]^2$$

M contiguous samples of \bar{y}

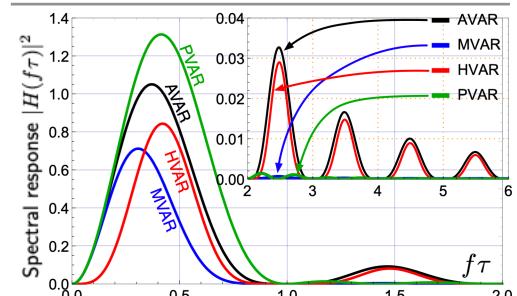


Frequency fluctuation PSD \leftrightarrow Allan Variance

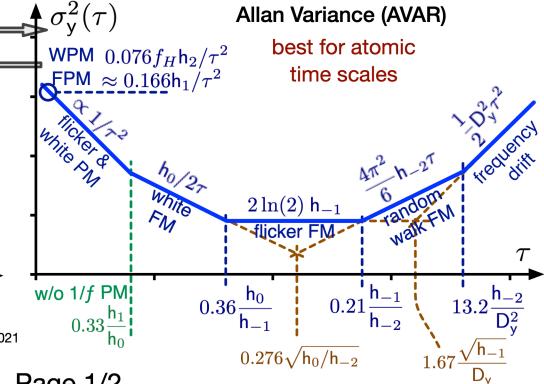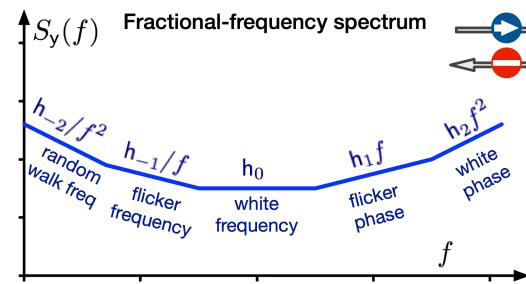


DOI: 10.5281/zenodo.4399219

©Enrico Rubiola
 ORCID 0000-0002-5364-1835

This document consists of two pages.
 For derivatives, use figures, tables and single pages available
 separately from E. Rubiola under the appropriate CC-BY license




Additive Noise
 RF noise added to the carrier
 Statistically independent AM & PM




Parametric Noise
 Near-dc noise modulates the carrier
 AM & PM related and narrowband


Leeson effect

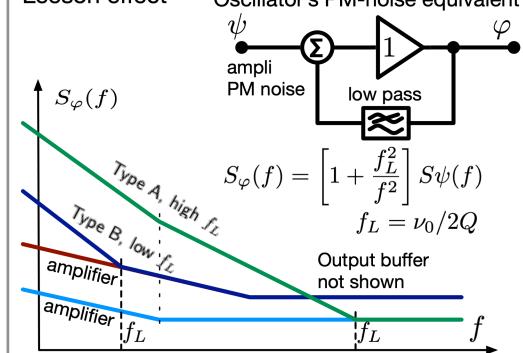





Time Domain

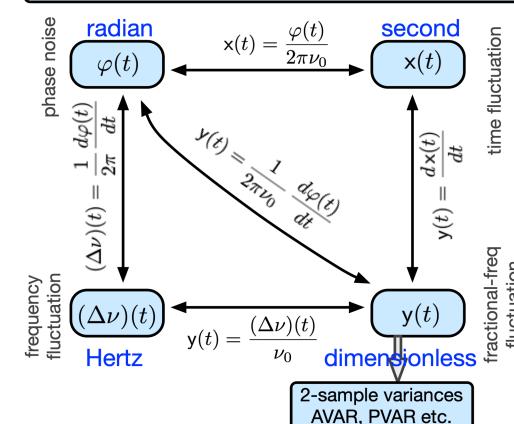

Frequency Domain

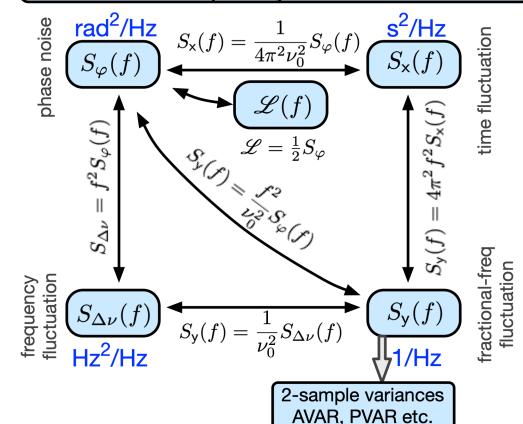


Spectra and Polynomial Law

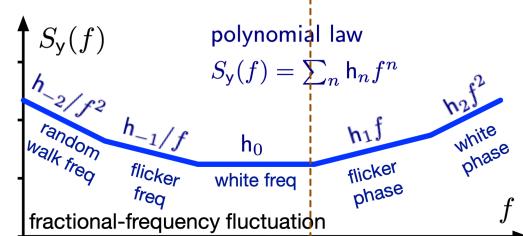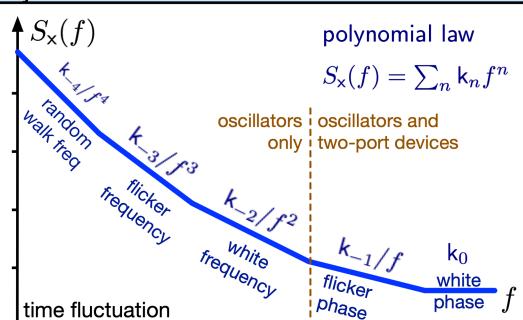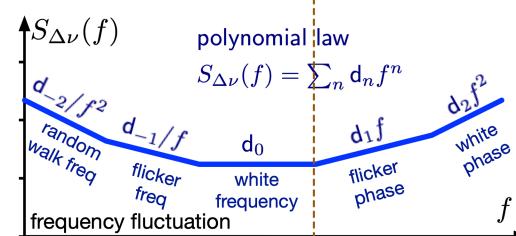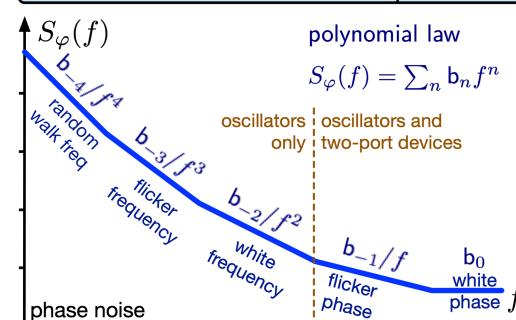





Enrico's Chart of Phase Noise and Two-Sample Variances



Enrico Rubiola - <http://rubiola.org>
 European Frequency and Time Seminar - <http://efts.eu>
 Oscillator Instability Measurement Platform <http://oscillator-imp.com>

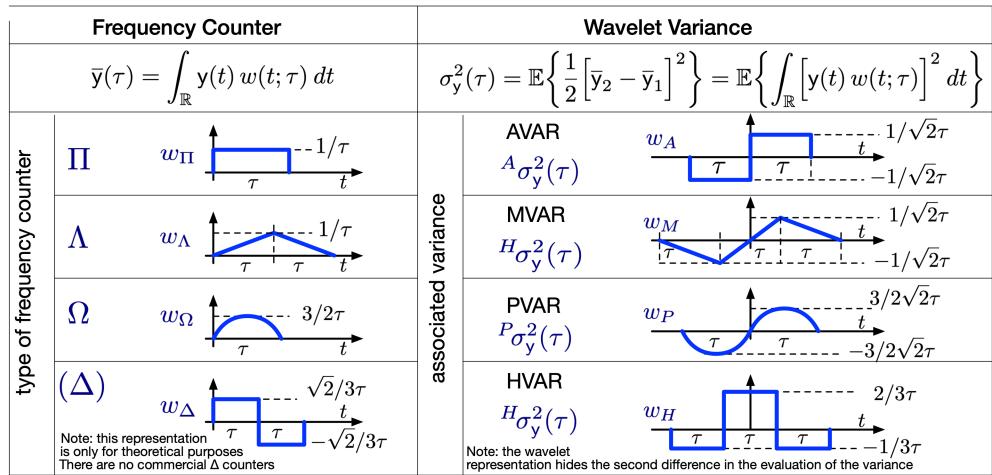

Other Two-Sample Variances

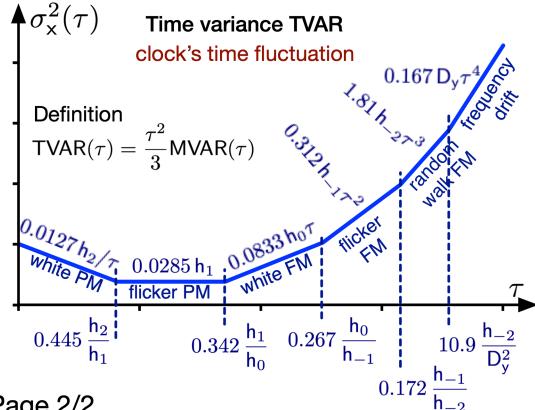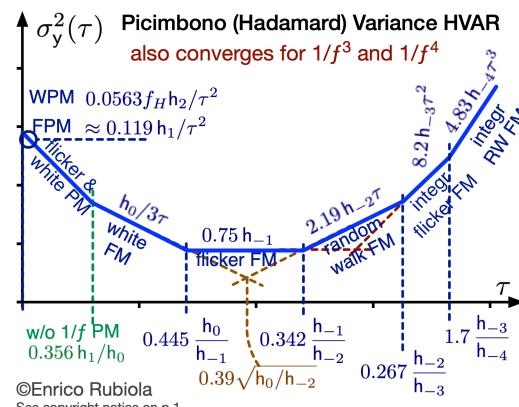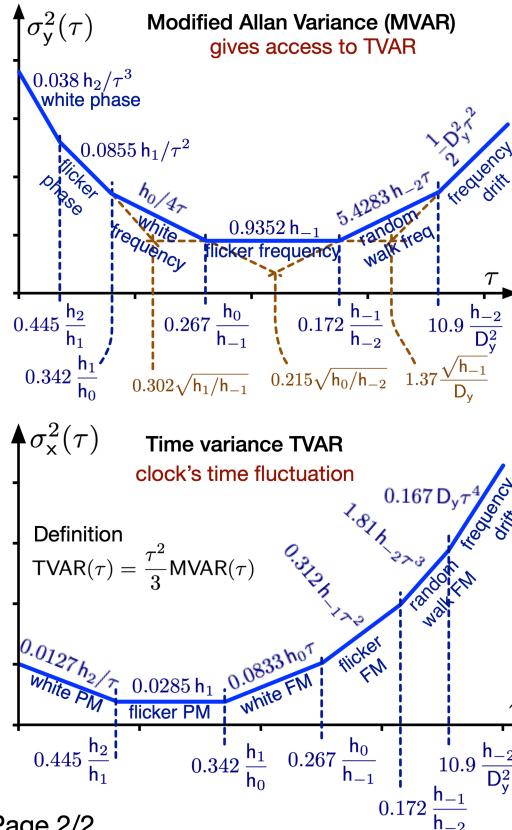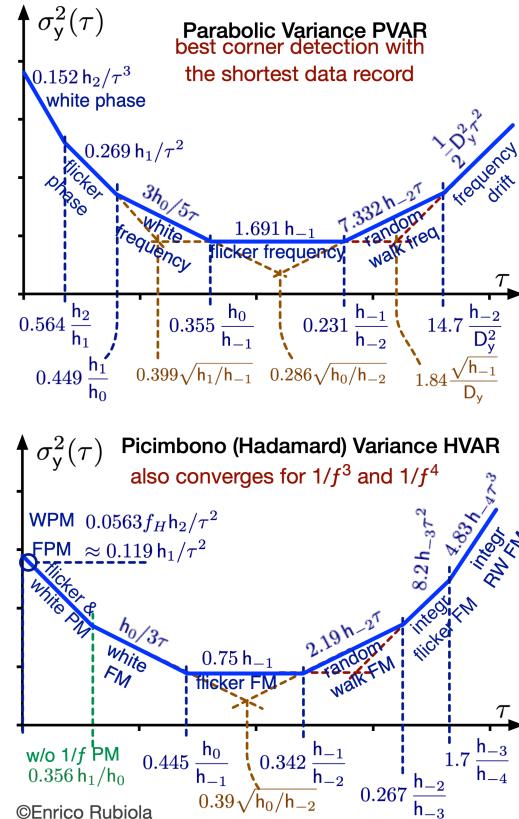

Spectra to Variances Conversion

| noise type | $S_y(f)$ | AVAR $A\sigma_y^2(\tau)$ | MVAR $M\sigma_y^2(\tau)$ | HVAR $H\sigma_y^2(\tau)$ | PVAR $P\sigma_y^2(\tau)$ | TVAR $\sigma_x^2(\tau)$ |
|---|-----------------|--|--|--|---|--|
| white PM | $h_2 f^2$ | $\frac{3f_H}{4\pi^2} \frac{h_2}{\tau^2}$ | $\frac{3}{8\pi^2} \frac{h_2}{\tau^3}$ | $\frac{5f_H}{9\pi^2} \frac{h_2}{\tau^2}$ | $\frac{3}{2\pi^2} \frac{h_2}{\tau^3}$ | $\frac{1}{8\pi^2} \frac{h_2}{\tau}$ |
| flicker PM | $h_1 f$ | $\frac{3\gamma - \ln 2 + 3 \ln(2\pi f_H \tau)}{4\pi^2} \frac{h_1}{\tau^2}$ | $\frac{(24 \ln 2 - 9 \ln 3) h_1}{8\pi^2} \frac{h_1}{\tau^2}$ | $\simeq \frac{5[\gamma + \ln(\sqrt[4]{48\pi} f_H \tau)]}{5[\gamma + \ln(\sqrt[4]{48\pi})]} \frac{h_1}{\tau^2}$ | $0.1520 h_2/\tau^3$ | $0.0127 h_2/\tau$ |
| white FM | h_0 | $\frac{1}{4} \frac{h_0}{\tau}$ | $\frac{1}{3} \frac{h_0}{\tau}$ | $\frac{1}{3} \frac{h_0}{\tau}$ | $\frac{3}{5} \frac{h_0}{\tau}$ | $\frac{1}{12} h_0 \tau$ |
| flicker FM | $h_{-1} f^{-1}$ | $2 \ln(2) h_{-1}$ | $\frac{8}{8} h_{-1}$ | $\frac{8 \ln 2 - 3 \ln 3}{3} h_{-1}$ | $\frac{2[7 - \ln(16)]}{5} h_{-1}$ | $\frac{27 h_{-3} - 32 h_{-2}}{24} h_{-1} \tau^2$ |
| random walk FM | $h_{-2} f^{-2}$ | $\frac{2\pi^2}{3} h_{-2} \tau$ | $\frac{11\pi^2}{20} h_{-2} \tau$ | $\frac{2\pi^2}{9} h_{-2} \tau$ | $\frac{20\pi^2}{35} h_{-2} \tau$ | $0.312 h_{-1} \tau^2$ |
| integrated flicker FM | $h_{-3} f^{-3}$ | not converging | not converging | $\pi^2 [27 \ln(3) - 32 \ln(2)] h_{-3} \tau^2$ | not converging | not converging |
| integrated RW FM | $h_{-4} f^{-4}$ | not converging | not converging | $\frac{44\pi^2}{90} h_{-4} \tau^3$ | not converging | not converging |
| linear drift D_y | | $\frac{1}{2} D_y^2 \tau^2$ | $\frac{1}{2} D_y^2 \tau^2$ | 0 | $\frac{1}{2} D_y^2 \tau^2$ | $\frac{1}{6} D_y^2 \tau^2$ |
| spectral response $ H(\theta) ^2$, $\theta = \pi f \tau$ | | $\frac{2 \sin^4(\theta)}{\theta^2}$ | $\frac{2 \sin^6(\theta)}{\theta^4}$ | $\frac{16 \sin^6(\theta)}{9\theta^2}$ | $\frac{\tau^2 2 \sin^6(\pi f \tau)}{3 (\pi f)^4}$ | $\sigma_x(\tau) = \frac{\tau^2}{3} M \sigma_y(\tau)$ |

MVAR, PVAR and TVAR formulas need $\tau > 1/f_H$, where $f_H < 1/2\tau_0$ is the cutoff frequency, and τ_0 is the sampling interval.

$$\sigma_x(\tau) = \frac{\tau^2}{3} M \sigma_y(\tau)$$